


## Energy yield comparison of N-TOPCon bifacial and PERC bifacial in Yinchuan, Ningxia

G j à

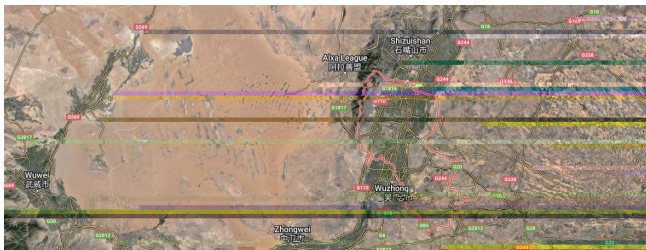

c g c

g i c

	P-type Bifacial Module	N-type Bifacial Module
Module Type	JKM540M-72HL4-BDVP	JKM560N-72HL4-BDV
No. of Modules/string	10 pieces	10 pieces
Ground condition		Grass
Mounting	Fixed adjustable tilted 40°	
Minimum standoff	1m(From module bottom to ground)	
Inverter	20RT-20	
Collection Frequency	Once a minute	
Generation per watt kWh/kW	baseline	+3.49%

